


4003-V3-TM-Locker Lock Manual

General Information

- ❖ Master code can be up to 6 digit
- ❖ Temporary code = S1 up (Random code to lock, same code to unlock)
- ❖ Permanent code = S1 down (Assign code by master code)
- ❖ User access code up to 13 digit and 1,000 user code
- ❖ Super Code is an optional (setup only by Distributor or Manufacture)
 - a. Each group can be used one time
 - b. Can be up to 3 group
 - c. Super code works on both locks
 - d. Reset one group code won't affect the other group code
 - e. Reset group code if needed

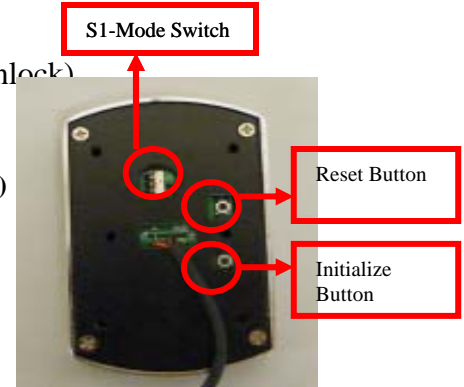

- ❑ **Initialize the lock:** (Press & hold until 2 beeps with red light on then released)
(This step is set back to manufacture default as below:)
 - TM-91 type (Manual type)
 - Clean up all the memory (code)
 - Set master code to default “123456”
 - Class mode
 - Super master code = None
- ❑ **How to setup super code:** (one time use only in emergency situation)
 - **1st Press * + 101299# + 1#**
 - **2nd Enter super code(random) + # (for example 222333)**
 - **3rd Enter super code (222333#) again to confirm, green light flash with 2 beeps**
 - * if there is an error, red light on with long beep and all setting will be cancelled
 - (Complete example: * + 101299# + 1# + 222333# + 222333#)
 - **To open lock with super code:**
 - ❖ ***110 + super code#**
 - “101299” indicate as a function code
 - “1” indicate as a “group 1”
 - (example: *101299#1#(group1), *101299#2#(group 2), *101299#3#(group 3))
- ❑ **How to change master code:** (071502 indicate as a function code)
 - *071502# + old master code# + 1# + new master code# + new master code#
(set up new master code without delete other code)
 - *071502# + old master code# + 0# + new master code# + new master code#
(set up new master code and delete all user code)
 - Initialize button to set master code back to manufacture default “123456” if necessary.
- ❑ **How to add iButton Key**
 - Press reset button once (green light on)
 - Touch D1990K iButton key as a “Master Key” (green light off)
 - Touch “Master Key” (green light on)
 - Touch “D1990K” one by one as an user key (wait until light goes off)
 - To access door {Touch D1990 key}
- ❑ **How to add user code:**
 - Hold “ * “ until green light flashing
 - Enter master code “123456#”
 - Enter “user code1# + user code2# +user code3# ...etc {then “* *” to exit}
 - For example: { * + 123456# + user code1# + user code2# + * * }**
 - To access door: enter “user code#” {For example: {2222#}}